# THE BRITISH LIBRARY SCIENCE REFERENCE AND INFORMATION SERVICE



WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:
C03C 13/00

(11) International Publication Number: WO 95/31411
(43) International Publication Date: 23 November 1995 (23.11.95)

(21) International Application Number: PCT

PCT/EP95/01843

(22) International Filing Date:

16 May 1995 (16.05.95)

(30) Priority Data:

P 44 17 231.1 195 03 172.5

17 May 1994 (17.05.94) 1 February 1995 (01.02.95)

DE DE

(71) Applicant (for all designated States except US): ISOVER SAINT-GOBAIN [FR/FR]; Les Miroirs, 18, avenue d'Alsace, F-92400 Courbeyoie (FR).

(72) Inventors; and


- (75) Inventors/Applicants (for US only): LOHE, Peter [DE/DE]; Ritterstrasse 5, D-67112 Mutterstadt (DE). HOLSTEIN, Wolfgang [DE/DE]; Herderstrasse 2, D-35315 Homberg (DE). SCHWAB, Wolfgang [DE/DE]; Schönauer Strasse 25, D-68723 Plankstadt (DE).
- (74) Agent: KADOR & PARTNER; Corneliusstrasse 15, D-80469 Munich (DE).

(81) Designated States: AU, BR, CA, CN, CZ, FI, HU, JP, KR, NO, NZ, PL, SI, SK, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

#### Published

With international search report.

#### (54) Title: A MINERAL-FIBER COMPOSITION

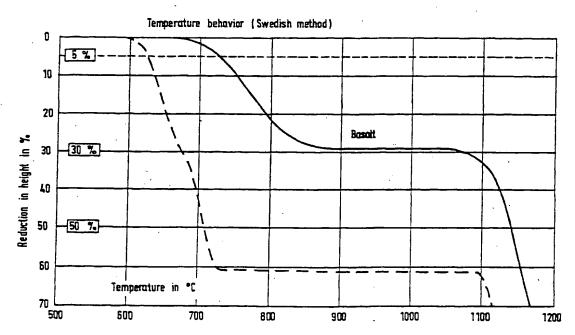

#### (57) Abstract

A biologically degradable mineral-fiber composition characterized by the following constituents in percent by weight: SiO<sub>2</sub> 50 to 65, Al<sub>2</sub>O<sub>3</sub> less than 2, CaO 16 to 30, MgO 4 to 15, Na<sub>2</sub>O 8 to 20, K<sub>2</sub>O 0 to 2, B<sub>2</sub>O<sub>3</sub> 0 to 10, TiO<sub>2</sub>, Fe<sub>2</sub>O<sub>3</sub>, Cr<sub>2</sub>O<sub>3</sub>, BaO, MnO, P<sub>2</sub>O<sub>5</sub> 0 to 5.

### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
ΑÜ	Australia	GE	5		
BB	Barbados	GN	Georgia	MW	Malawi
BE	Belgium		Guinea	NE	Niger
BF	<b>.</b>	GR	Greece	NL	Netherlands
	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	П	Italy	PL	Poland
BR	Brazil	JP	Japan	· PT	Portugal
BY	Belarus	KE	Кепуа	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo	•	of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegai
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Larvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	ŪA.	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon			•••	

PCT/EP95/01843

#### A mineral-fiber composition

The present invention relates to a mineral-fiber composition that is biologically degradable.

The prior art describes some mineral-fiber compositions which are said to be biologically degradable.

The biological degradability of mineral-fiber compositions is of great importance because various studies point out that mineral fibers with very small diameters in the range of less than 3 microns are suspected to be carcinogenic, while biologically degradable mineral fibers of such dimensions show lower or no carcinogenicity.

However not only the biological degradability is of crucial importance but also the mechanical and thermal properties of the mineral fibers, or the products produced therefrom, and the processibility of the mineral-fiber composition. For example mineral fibers are used to a great extent for insulation purposes. In particular for this application in the industrial area sufficient temperature stability of the mineral fibers is necessary.

Also, the mineral-fiber composition must permit processibility by known methods for producing mineral fibers with a small diameter, for example the jet process.

The invention is based on the problem of providing a novel mineral-fiber composition that is characterized by biological degradability, has good temperature stability and is easy to process.

The invention is based on the finding that this problem can be solved by a mineral-fiber composition that is built up substantially from silicon oxide, calcium oxide, magnesium oxide and sodium oxide.

It has turned out that such a mineral-fiber composition fulfills the combination of the necessary properties, namely biological degradability, temperature stability and good processibility.

The object of the invention is a mineral-fiber\_composition that is biologically degradable, characterized by the following constituents in percent by weight:

SiO <sub>2</sub>	50	to 65
Al <sub>2</sub> O <sub>3</sub>	less	than 2
CaO	16	to 30
MgO	4	to 15
Na <sub>2</sub> O	8	to 20
K <sub>2</sub> O	0	to 2
B <sub>2</sub> O <sub>3</sub>	0	to 10
TiO <sub>2</sub> , Fe <sub>2</sub> O <sub>3</sub> , Cr <sub>2</sub> O <sub>3</sub> , BaO, MnO, P <sub>2</sub> O <sub>5</sub>	0	to 5

The inventive mineral-fiber compositions are drawable by the jet process or the rotary process. The obtained fibers have good temperature stability. Surprisingly enough, the mineral-fiber compositions show biological degradability. The mean fiber diameter is preferably 10 microns or less, and especially between 2.5 and 5 microns.

The inventive mineral-fiber compositions preferably have the following constituents in percent by weight:

SiO <sub>2</sub>	55 to 60
Al <sub>2</sub> O <sub>3</sub>	less than 1.5
CaO	16 to 25
MgO	5 to 15
Na <sub>2</sub> O	9 to 15
K <sub>2</sub> O	less than 2
B <sub>2</sub> O <sub>3</sub>	0 to 8
TiO <sub>2</sub> , Fe <sub>2</sub> O <sub>3</sub> , Cr <sub>2</sub> O <sub>3</sub> , BaO, MnO, P <sub>2</sub> O <sub>5</sub>	0 to 5

In particular, the inventive mineral-fiber compositions have the following constituents in percent by weight:

SiO <sub>2</sub>	55	to 59
Al <sub>2</sub> O <sub>3</sub>	less	than 1.5
CaO	18	to 23
MgO	8	to 12
Na <sub>2</sub> O	9	to 13
K <sub>2</sub> O	less	than 1
B <sub>2</sub> O <sub>3</sub>	0	to 3
TiO <sub>2</sub> , Fe <sub>2</sub> O <sub>3</sub> , Cr <sub>2</sub> O <sub>3</sub> , BaO, MnO, P <sub>2</sub> O <sub>5</sub>	0 .	to 3

The content of magnesium oxide is preferably 6 to 12 percent by weight and in particular 8 to 12 percent by weight.

The content of chromium oxide is preferably less than 1.5 percent by weight and in particular less than 1.0 percent by weight.

The content of boron oxide is preferably less than 4 percent by weight.

To assess biological degradability the standard powder test of the German Glass Society was used. This is an easily conducted method and gives a sufficient measure of biological degradability. The method is described in L. Springer, "Laboratoriumsbuch für die Glasindustrie", 3rd edition, 1950, Halle/S: W. Knapp Verlag.

The temperature behavior of the mineral fibers was determined by the Swedish method. In this method a silit tube furnace is used with a horizontal working tube open on both sides having a length of 350 mm and an inside diameter of 27 mm. In the center of the furnace there is a small ceramic supporting plate (30 X 20 X 3 mm) for holding the test sample. The test sample has dimensions of 12 X 12 X 12 mm or 12 mm c X 12 mm height. The bulk density is normally 100 kg/m<sup>3</sup>. The temperature increase is 5 K/min. The change in test sample height is determined continuously with a reading optic.

The invention shall be described in more detail in the following with reference to examples.

#### Example 1

A mineral wool of the following composition in percent by weight was produced:

SiO <sub>2</sub>	56
Al <sub>2</sub> O <sub>3</sub>	0.5
CaO	20
MgO	10
Na <sub>2</sub> O	10
B <sub>2</sub> O <sub>3</sub>	2.7

This composition could be processed well to mineral fibers with a mean diameter of 2.5 microns by the jet process at a drawing temperature of 1330°C.

An investigation according to the standard powder test of the German Glass Society yielded a value of 35 mg/kg and thus a value for high biological degradability.

Determination of temperature behavior by the Swedish method yielded a temperature stability at 5% reduction in height of 620°C, which can be clearly seen from the corresponding diagram shown by way of example in the single drawing.

#### Example 2

A mineral wool with the following composition in percent by weight was produced:

	% by weight	Mole %
$SiO_2$	56	52.75
Al <sub>2</sub> O <sub>3</sub>	1.0	0.55
CaO	21	21.20
MgO	11	15.45
Na <sub>2</sub> O	11	10.05

This composition could be processed well to mineral fibers with a mean diameter of 2.7 microns by the jet process at a drawing temperature of 1310°C.

An investigation according to the standard powder test of the German Glass Society yielded a value of 37 mg/kg and thus a value for high biological degradability.

Determination of temperature behavior by the Swedish method yielded a temperature stability at 5% reduction in height of 600°C.

#### Claims

1. A mineral-fiber composition that is biologically degradable, characterized by the following constituents in percent by weight:

SiO <sub>2</sub>	50	to 65
Al <sub>2</sub> O <sub>3</sub>	less t	hàn 2
CaO	16	to 30
MgO	4	to 15
Na <sub>2</sub> O	8	to 20
K <sub>2</sub> O	. 0	to 2
B <sub>2</sub> O <sub>3</sub>	0	to 10
TiO <sub>2</sub> , Fe <sub>2</sub> O <sub>3</sub> , Cr <sub>2</sub> O <sub>3</sub> , BaO, MnO, P <sub>2</sub> O <sub>5</sub>	0	to 5

2. The mineral-fiber composition of claim 1, characterized by the following constituents in percent by weight:

SiO <sub>2</sub>	55	to 60
Al <sub>2</sub> O <sub>3</sub>	less t	han 1.5
CaO	16	to 25
MgO	5	to 15
Na <sub>2</sub> O	9	to 15
K <sub>2</sub> O	less t	han 2
B <sub>2</sub> O <sub>3</sub>	0	to 8
TiO <sub>2</sub> , Fe <sub>2</sub> O <sub>3</sub> , Cr <sub>2</sub> O <sub>3</sub> , BaO, MnO, P <sub>2</sub> O <sub>5</sub>	0	to 5


3. The mineral-fiber composition of claim 1, characterized by the following constituents in percent by weight:

SiO<sub>2</sub> 55 to 59

Al <sub>2</sub> O <sub>3</sub>	less t	han 1.5
CaO	18	to 23
MgO	8	to 12
Na <sub>2</sub> O	9	to 13
K <sub>2</sub> O	less ti	han 1
B <sub>2</sub> O <sub>3</sub>	0	to 3
TiO <sub>2</sub> , Fe <sub>2</sub> O <sub>3</sub> , Cr <sub>2</sub> O <sub>3</sub> , BaO, MnO, P <sub>2</sub> O <sub>5</sub>	0	to 3

<sup>4.</sup> The mineral-fiber composition of any of claims 1 to 3, characterized in that the content of boron oxide is less than 4 percent by weight.



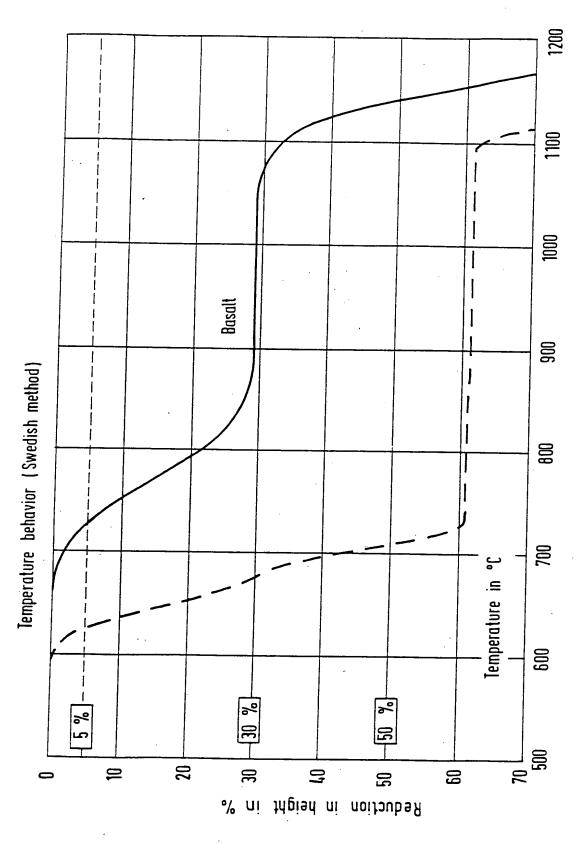

## SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

Inten .1al Application No

		l l	FC1/EF 33/01843
A. CLAS IPC 6	SSIFICATION OF SUBJECT MATTER C03C13/00		
According	to International Patent Classification (IPC) or to both national cl	assification and IPC	
	DS SEARCHED		
IPC 6	documentation scarched (classification system followed by classif CO3C	ication symbols)	
Document	auon searched other than minimum documentation to the extent tr	nal such documents are incl	luded in the fields searched
Electronic	data base consulted during the international search (name of data	hase and, where practical.	search terms used)
C. DOCUM	MENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of th	e reievant passages	Relevant to claim No.
A	WO,A,89 12032 (MANVILLE SALES C 14 December 1989 see page 5 - page 6; example 22	·	1-4
A	FR,A,2 690 438 (ISOVER SAINT-GO October 1993 see claim 1; example 2	BAIN) 29	1-4
A	WO,A,92 09536 (PAROC OY AB) 11 see claims	June 1992	1-4
	· · · · · · · · · · · · · · · · · · ·		
Furti	her documents are listed in the continuation of box C.	X Patent family n	nombers are listed in annex.
A docume consider filing diff. docume which i cuation other m. P docume later the Date of the a	ent which may throw doubts on priority claim(s) or is cited to establish the publication date of another in or other special reason (as specified) and referring to an oral disclosure, use, exhibition or heans and prior to the international filing date but can the priority date claimed actual completion of the international search	or priority date and cited to understand invention  'X' document of particity cannot be consider involve an inventiv  'Y' document of particity cannot be considered document is combinents, such	dished after the international filing date of not in conflict with the application but it the principle or theory underlying the utilar relevance; the claimed invention ed novel or cannot be considered to be step when the document is taken alone utilar relevance; the claimed invention ed to involve an inventive step when the ned with one or more other such documation being obvious to a person skilled of the same patent family the international search report
	August 1995  nating address of the ISA  European Patent Office, P.B. 5818 Patentlaan 2  NI 2280 HV Rijswijk  Tel. (+ 31-70) 340-2040, Tx. 31 651 epo ni,  I'az (+ 31-70) 340-3016	Authorized officer  Van Bomi	mel, L

1

### INTERNATIONAL SEARCH REPORT

information on patent family members

PCT/EP 95/01843

Patent document cited in search report	Publication date	Patent family member(s)		Publication date	
WO-A-8912032	14-12-89	AU-A- US-A-	3765789 5332699	05-01-90 26-07-94	
FR-A-2690438	29-10-93	AU-B- BR-A- CA-A- CN-A- CZ-A- EP-A- WO-A- HU-A- JP-T- NO-A- SI-A-	4263293 9305492 2110998 1078708 9302865 0596088 9322251 67212 6508600 934725 9300218	29-11-93 11-10-94 11-11-93 24-11-93 19-10-94 11-05-94 11-11-93 28-03-95 29-09-94 20-12-93 31-12-93	
WO-A-9209536	11-06-92	FI-B- AT-T- AU-A- DE-D- EP-A-	93346 117662 8908791 69107091 0558548	15-12-94 15-02-95 25-06-92 09-03-95 08-09-93	